


EXPLOSIVE DUSTY ATMOSPHERES

EUROPEAN DIRECTIVE ATEX 94/9/EC
APPLICATION: 1st July 2003

EUROPEAN STANDARDS
EN 50281.1.1 : manufacturing and testing regulations
EN 50281.1.2 : selection, installation and maintenance

International standard IEC EN60079-10
defines danger zones according to the risk
of encountering an explosive atmosphere.

STANDARDIZATION

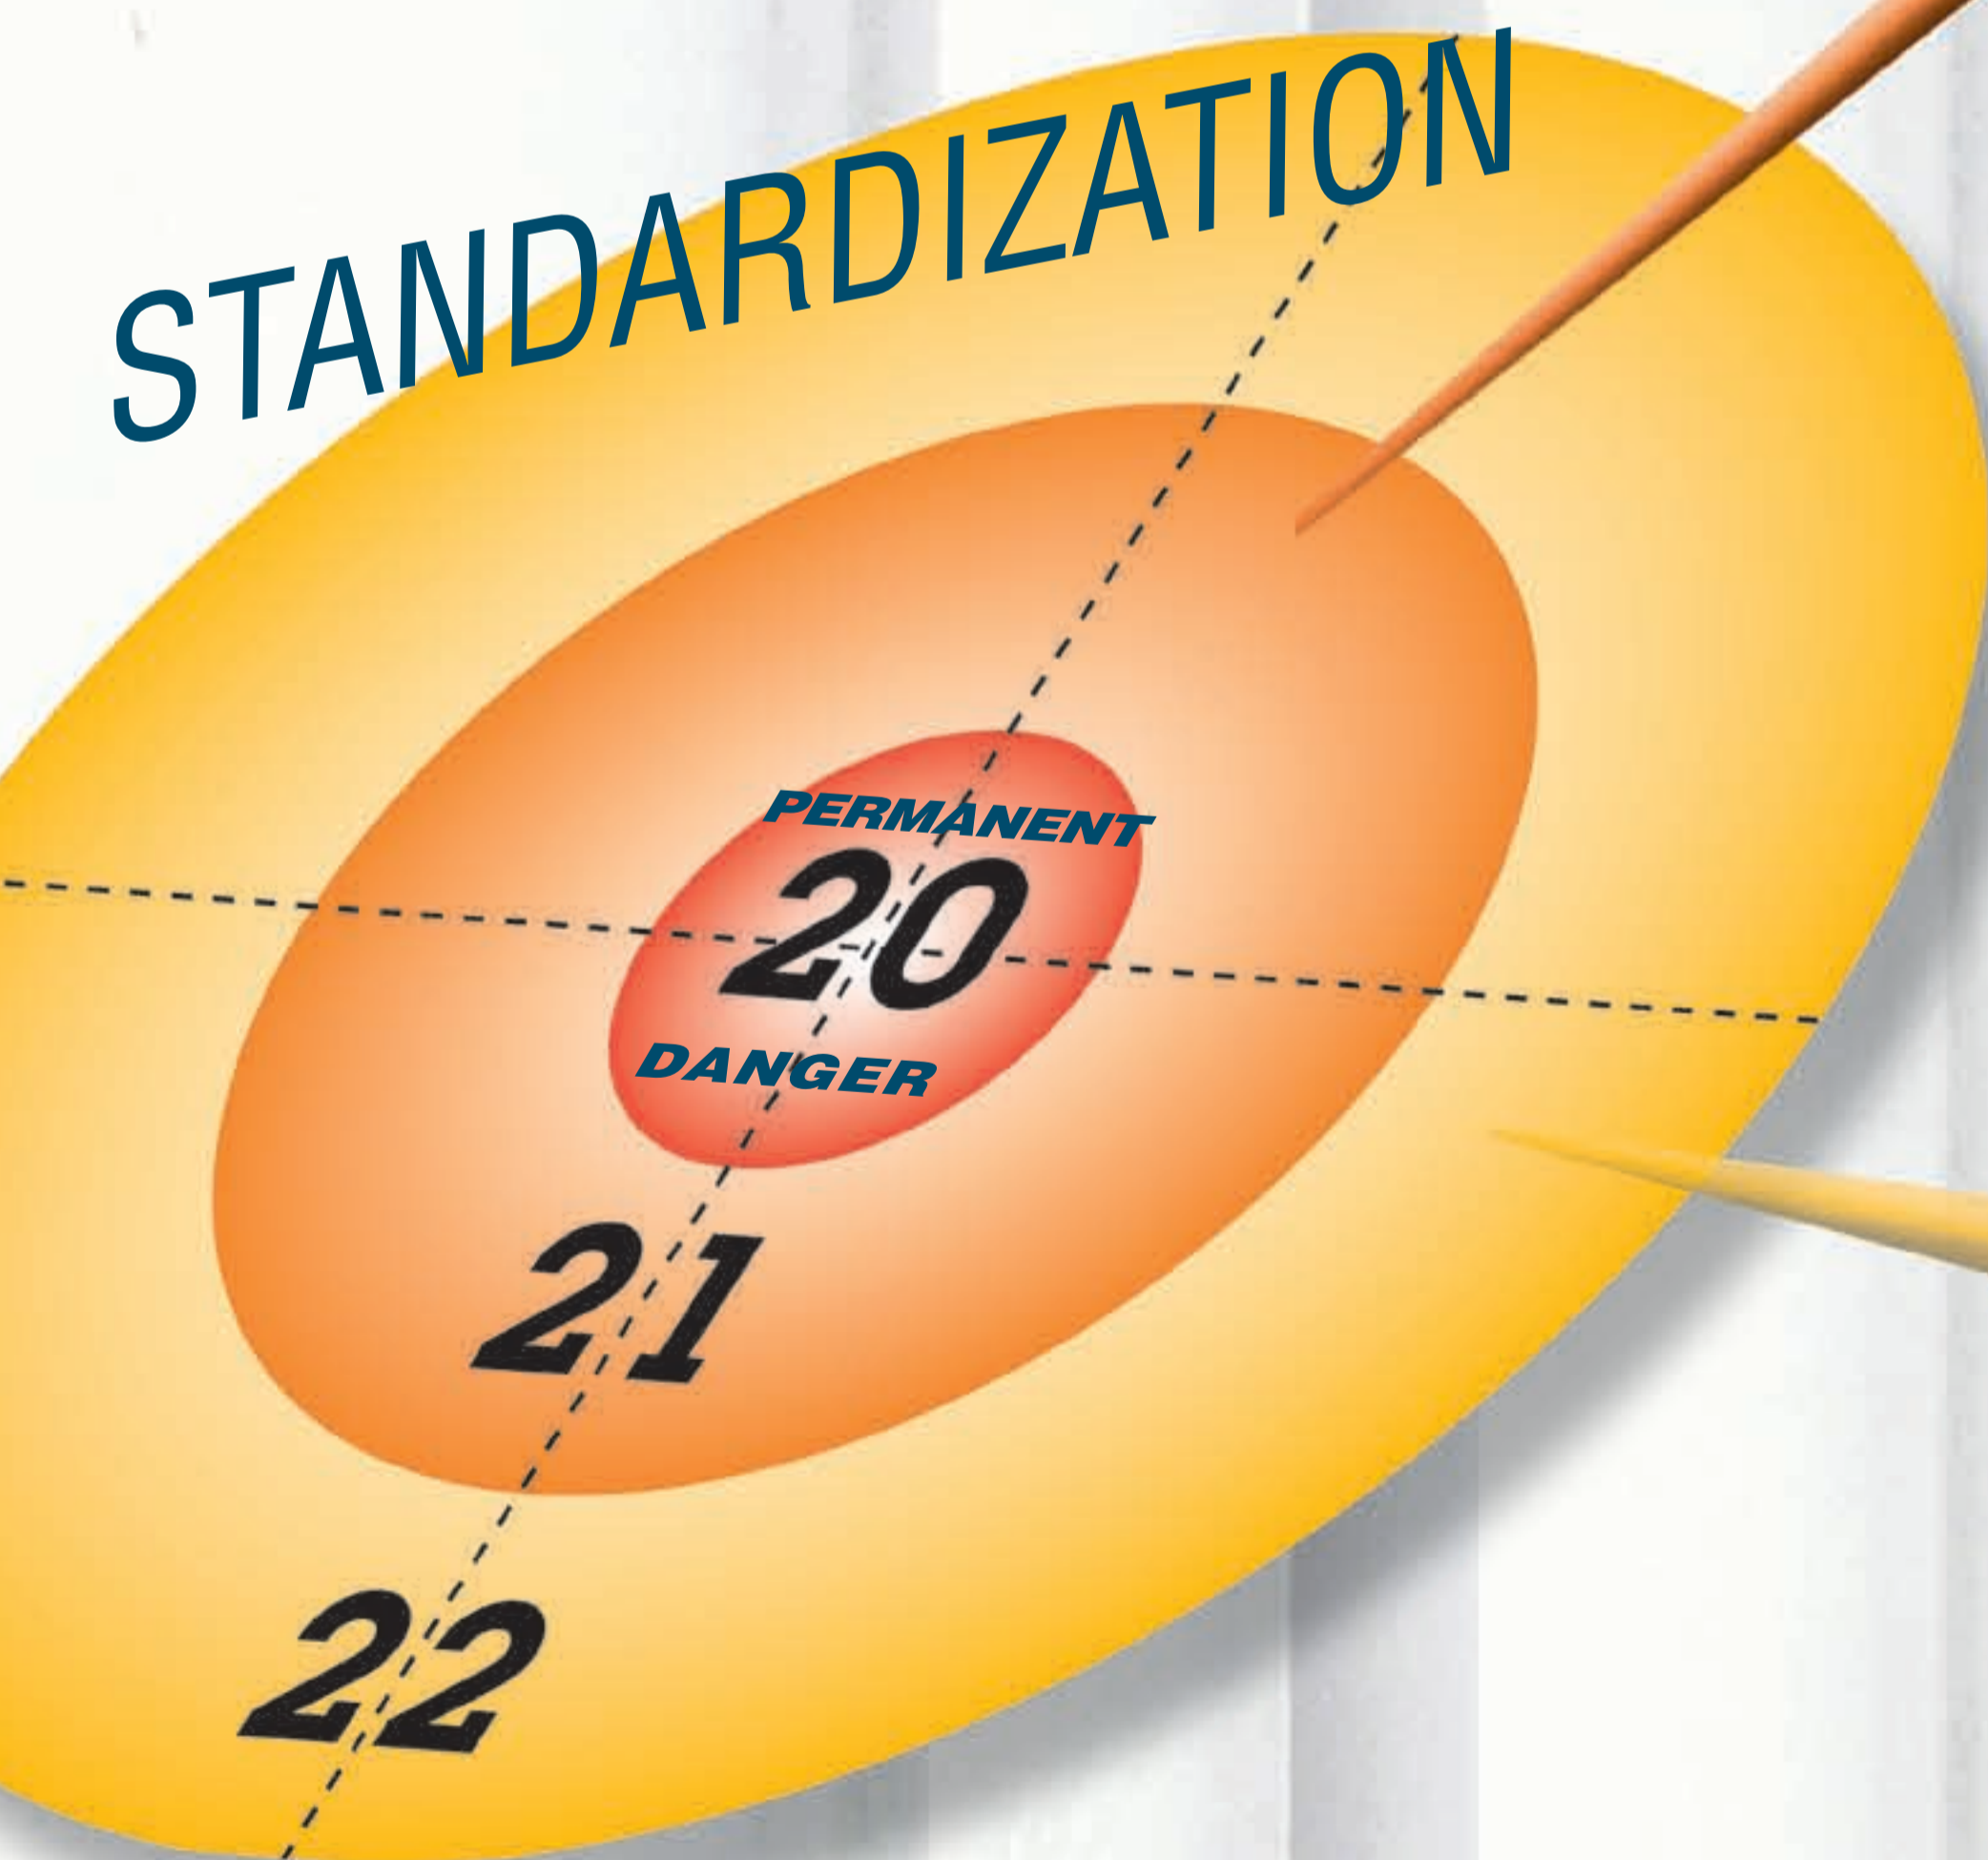

POTENTIAL
DANGER


OFFER



0,18 → 400kW

MINIMAL
DANGER

- LSPX / FLSPX / LSPX FAP / GEARBOXES
- Guaranteed surface temperature : 125°C
- IP 65

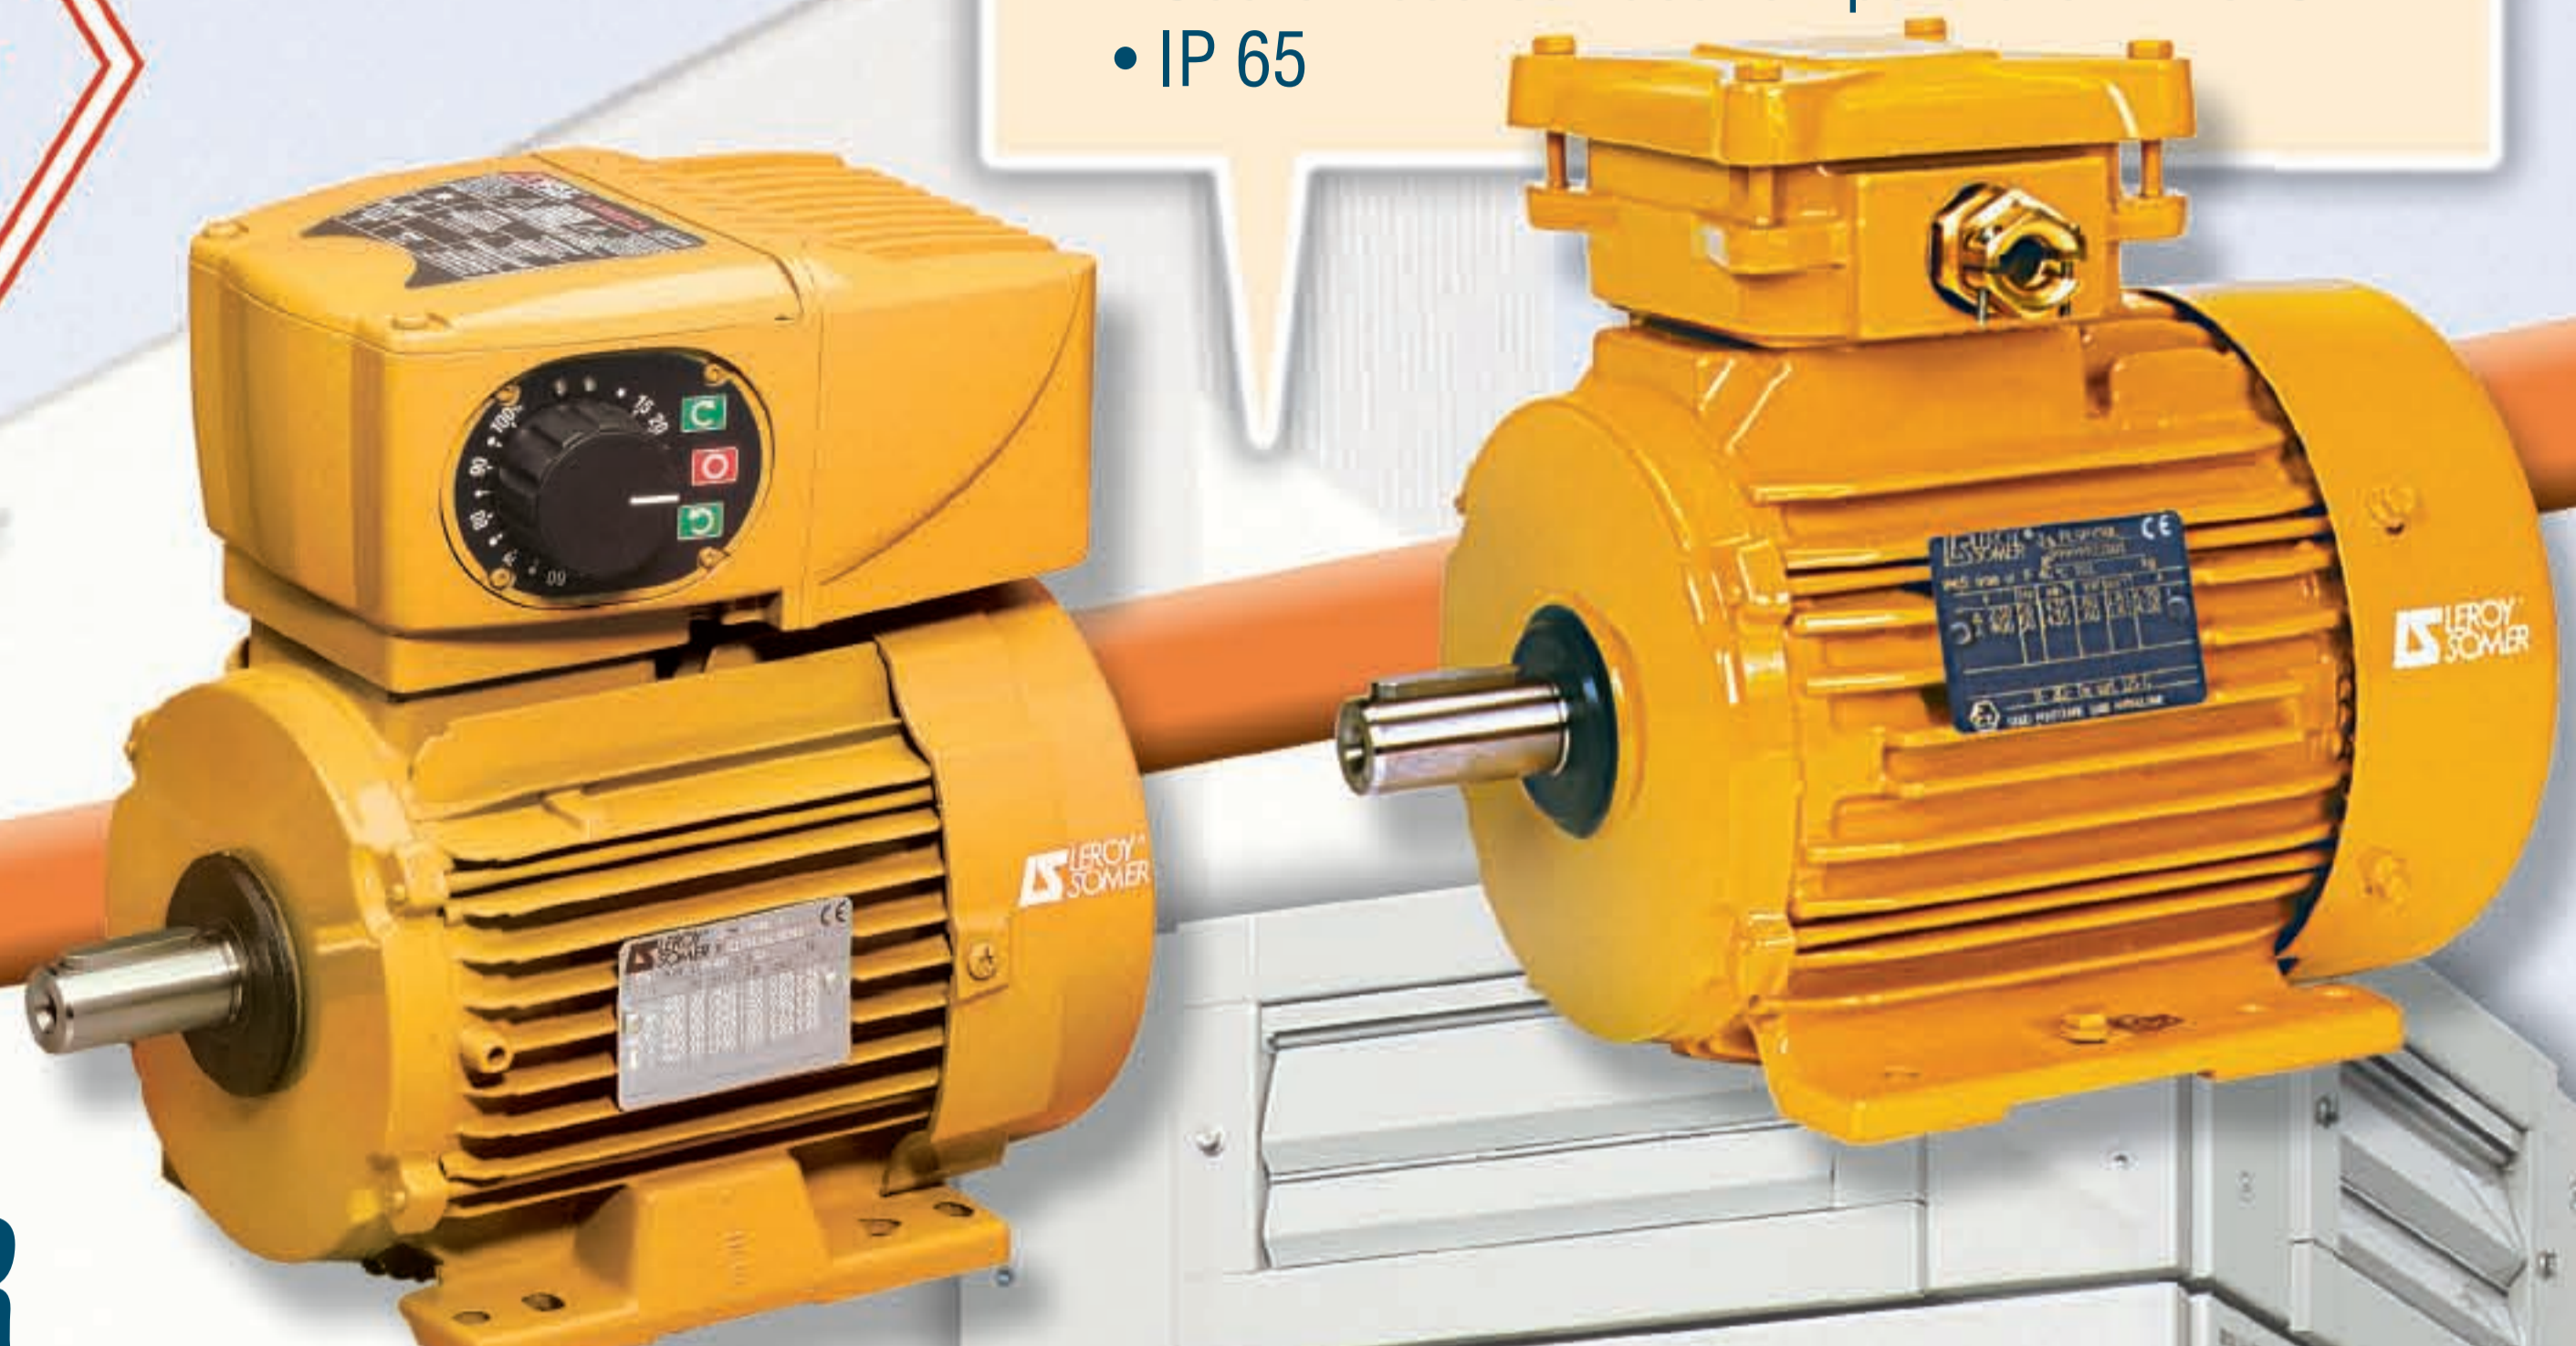

LEROY SOMER
POWER DRIVE

- LS / FLS / GEARBOXES
- Guaranteed surface temperature : 125°C
- IP 55

