








The Brand You Trust, The Power You Depend On.

LSA 50.2 – 1250 to 1650 kVA

Low Voltage Alternators - 4 Pole



-  Compact & Rigid
-  Industry best Efficiency
-  Better motor starting capability
-  High power density (Lighter weight)
-  Superior thermal life

LEROY-SOMER™

Nidec
All for dreams

General Characteristics

| | | | |
|------------------|-----------------------|---------------------------------|---------------------------|
| Insulation Class | H | Excitation System | AREP |
| Winding pitch | 2/3 | AVR Model | R 450 / D510 C (Optional) |
| Terminals | 6 / 12 (Optional) | Voltage Regulation (*) | ± 0.5% |
| Protection | IP 23 | Sustained short-circuit current | 300 % of FLC for 10 s |
| Altitude | ≤ 1000 m | Total harmonic Distortion (**) | < 3.5% |
| Over speed | 120% for 2 mins | Wave form : TIF (**) | < 50 |
| Air flow | 1.8 m ³ /s | | |

(*) Steady state duty. (**) Total harmonic distortion between phases, no-load or on-load (non-distorting).

Ratings kVA @ 0.8 P.F

3 Phase 415 V, 50 Hz – 1500 RPM***

| Duty | Class/Temp. Rise | M6 | L8 | VL 10 |
|-------------------------|------------------|------|------|-------|
| Continuous duty / 40° C | H / 125° C | 1250 | 1500 | 1650 |
| | F / 105° C | 1125 | 1350 | 1455 |
| Stand by-duty / 27° C | H / 163° C | 1375 | 1650 | 1760 |

(***) Also offering multi-voltage/60 Hz/1800 RPM.


Reactance (%). Time constants (ms) - Class H / 125° C – 415 V




| Parameter | Description | M6 | L8 | VL 10 |
|-----------|---|-------|-------|-------|
| Kcc | Short-circuit ratio | 0.311 | 0.311 | 0.33 |
| Xd | Direct-axis synchro reactance unsaturated | 392 | 378 | 362 |
| Xq | Quadrature-axis synchro reactance unsaturated | 235 | 227 | 217 |
| T'do | No Load Transient time constant | 3634 | 3910 | 4058 |
| X'd | Direct-axis transient reactance saturated | 19.4 | 17.4 | 16 |
| T'd | Short-Circuit transient time constant | 180 | 180 | 180 |
| X''d | Direct-axis sub transient reactance saturated | 16.5 | 14.8 | 13.6 |
| T''d | Sub transient time constant | 18 | 18 | 18 |
| X''q | Quadrature-axis sub transient reactance saturated | 17.3 | 15.4 | 14.2 |
| Xo | Zero sequence reactance unsaturated | 3.6 | 3.3 | 3.1 |
| X2 | Negative sequence reactance saturated | 16.9 | 15.1 | 13.9 |
| Ta | Armature time constant | 27 | 27 | 27 |

Other data - Class H / 125° C – 415 V


| Parameter | Description | M6 | L8 | VL 10 |
|-----------|---------------------------------|-------|-------|-------|
| io(A) | No load excitation current | 0.9 | 0.9 | 0.9 |
| ic(A) | Full load excitation current | 4.1 | 3.9 | 3.6 |
| uc(V) | Full load excitation voltage | 44 | 42 | 49 |
| ms | Recovery time (ΔU = 20% trans.) | ≤ 500 | ≤ 500 | ≤ 500 |

Efficiencies 415 V – 50 HZ (P.F – 0.8)

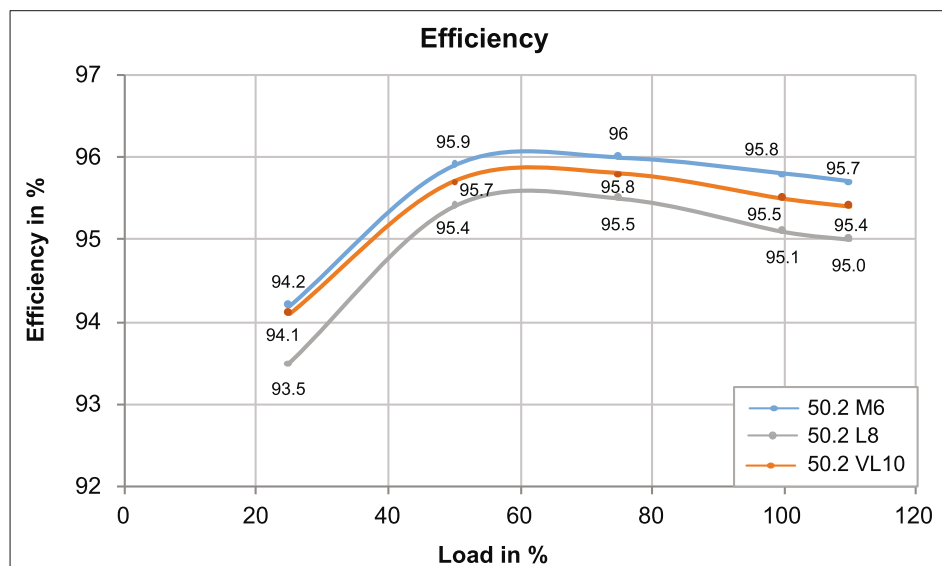


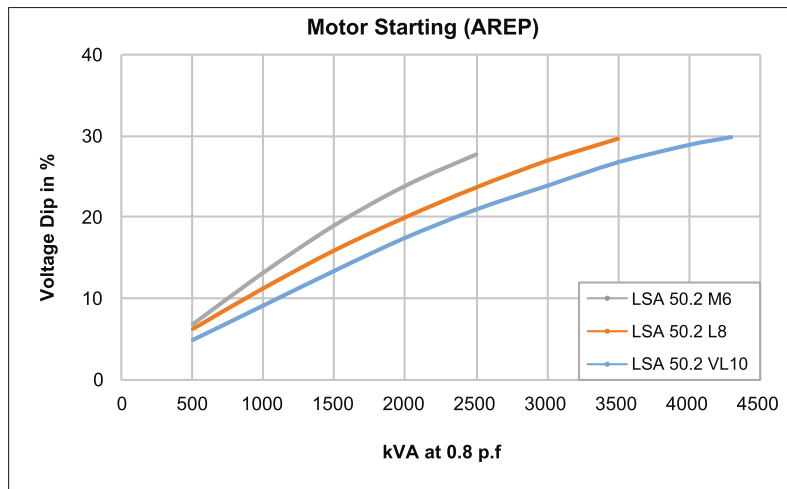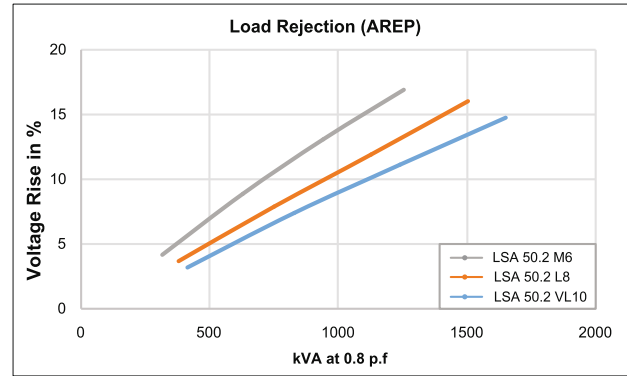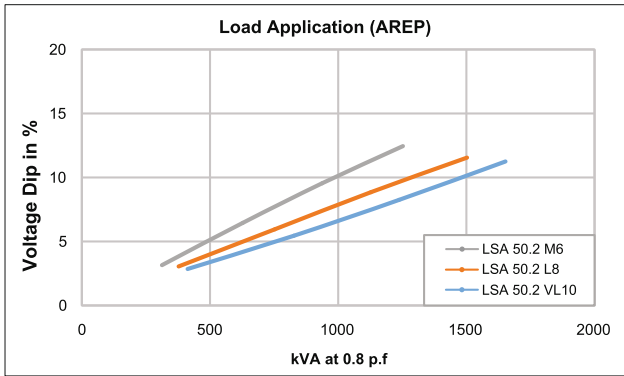

1. For a starting P.F. differing from 0.6, the starting kVA must be multiplied by $(\text{Sine } \phi / 0.6)$
2. For voltages other than 415V(Y) at 50 Hz, then kVA must be multiplied by $(415/\text{Other voltage})^2$

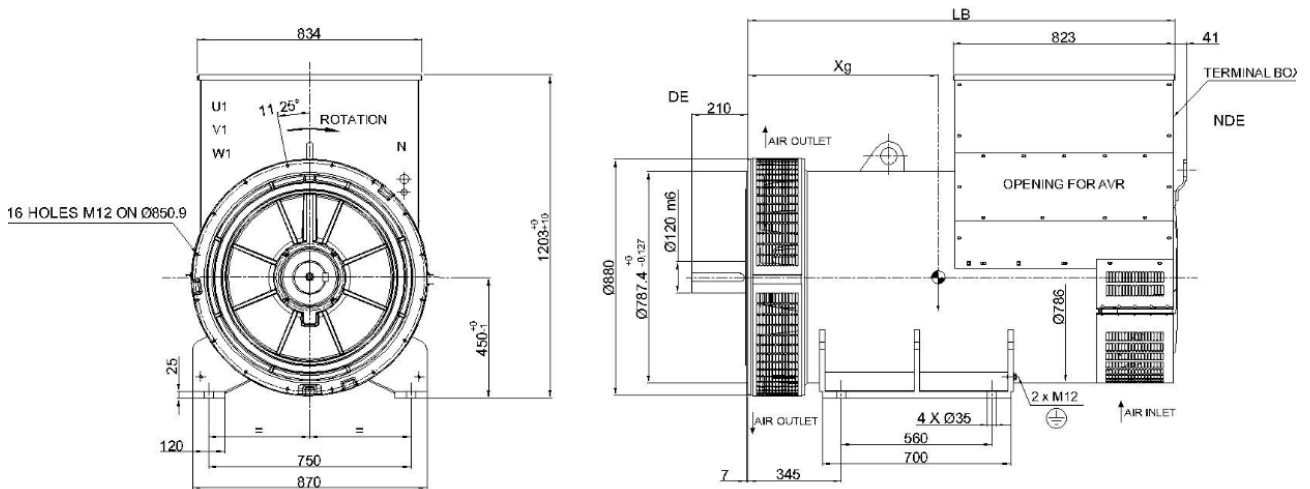


| Type | LB | Xg | Weight (Kg) Approx. |
|---------------|------|-----|---------------------|
| LSA 50.2 M6 | 1378 | 620 | 2530 |
| LSA 50.2 L8 | 1478 | 690 | 3010 |
| LSA 50.2 VL10 | 1578 | 740 | 3300 |

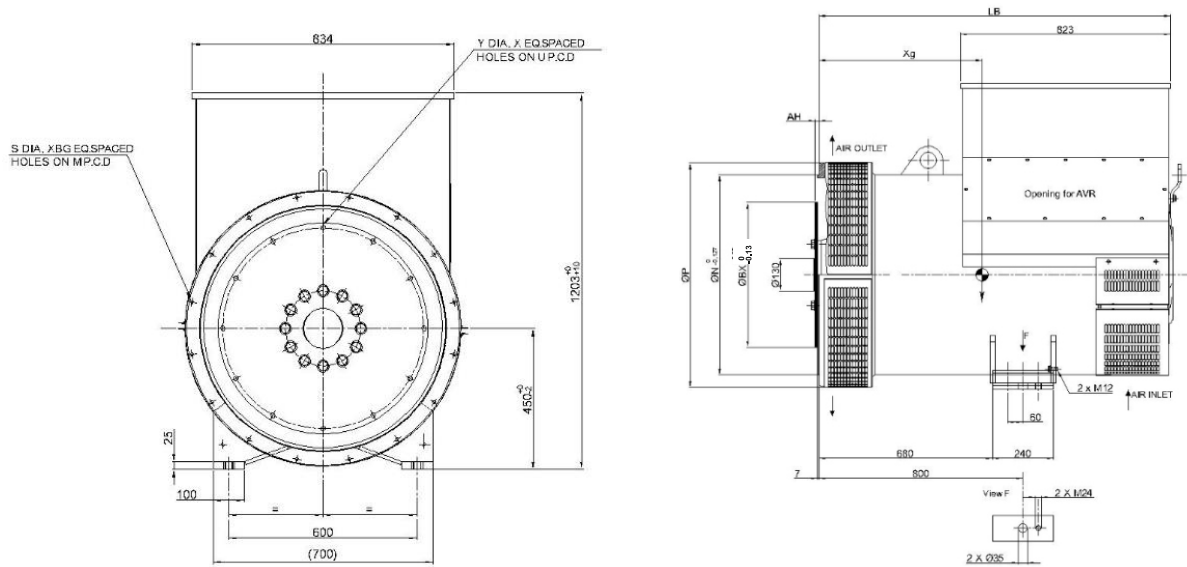

| Frame Dimensions (mm) & Weight | | | | | | Coupling | | | | | |
|--------------------------------|------|-------|---------------------|-----|----|-----------------|-------|-------|----|----|------|
| Type | LB | Xg | Weight (Kg) Approx. | | | Flex Plate | | 18 | 21 | | |
| LSA 50.2 M6 | 1378 | 640 | 2490 | | | Flange S.A.E 0 | | ✓ | X | | |
| LSA 50.2 L8 | 1478 | 710 | 2790 | | | Flange S.A.E 00 | | ✓ | ✓ | | |
| LSA 50.2 VL10 | 1578 | 760 | 3260 | | | | | | | | |
| Flange (mm) | | | | | | Flex Plate (mm) | | | | | |
| S.A.E | P | N | M | XBG | S | S.A.E | BX | U | X | Y | AH |
| 0 | 880 | 647.7 | 679.5 | 16 | 14 | 21 | 673.1 | 641.3 | 12 | 18 | 0 |
| 00 | 880 | 787.4 | 850.9 | 16 | 14 | 18 | 571.5 | 542.9 | 6 | 18 | 15.7 |

Torsional Analysis Data

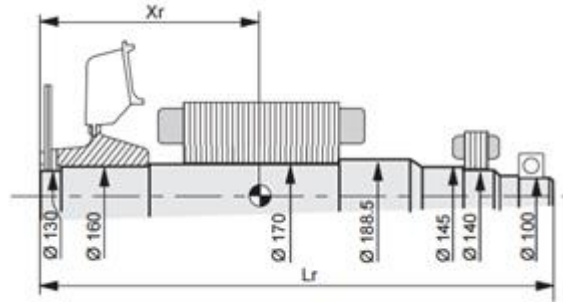

| Centre of gravity: Xr (mm), Rotor length: Lr (mm), Weight: M (kg), Moment of inertia: J (kgm ²): (4J = MD ²) | | | | | | | | |
|--|----------------------|--------|------|-------|----------------------|--------|------|-------|
| Type | Flex Plate S.A.E. 18 | | | | Flex Plate S.A.E. 21 | | | |
| | Xr | Lr | M | J | Xr | Lr | M | J |
| LSA 50.2 M6 | 608 | 1420.5 | 934 | 20.76 | 593 | 1420.5 | 932 | 21.09 |
| LSA 50.2 L8 | 666 | 1520.5 | 1083 | 24.72 | 652 | 1520.5 | 1081 | 25.05 |
| LSA 50.2 VL10 | 713 | 1620.5 | 1193 | 27.39 | 698 | 1620.5 | 1191 | 27.72 |



According to IS : 13364, I.E.C. 60034-1/34-2. The values indicated are typical.
 © Nidec 2017. The information contained in this brochure is for guidance only and does not form part of any contract. The accuracy cannot be guaranteed as Nidec have an ongoing process of development and reserve the right to change the specification of their products without notice.
Nidec Industrial Automation India Private Ltd.
 #45, Nagarur, Huskur Road, Off Tumkur Road, Bengaluru - 562 162. India
 T +91 80 6726 4800 | F +91 80 2371 7808
 Sales Enquiry: sales.epgi@mail.nidec.com | Service Enquiry: service.epgi@mail.nidec.com