


8 TROUS Ø11 EQUID. SUR Ø333,38
 8 HOLES Ø11 EQUID. ON Ø333,38


Ø409,58_{±0,127}

12 TROUS Ø11 EQUID. SUR Ø428,62
 12 HOLES Ø11 EQUID. ON Ø428,62

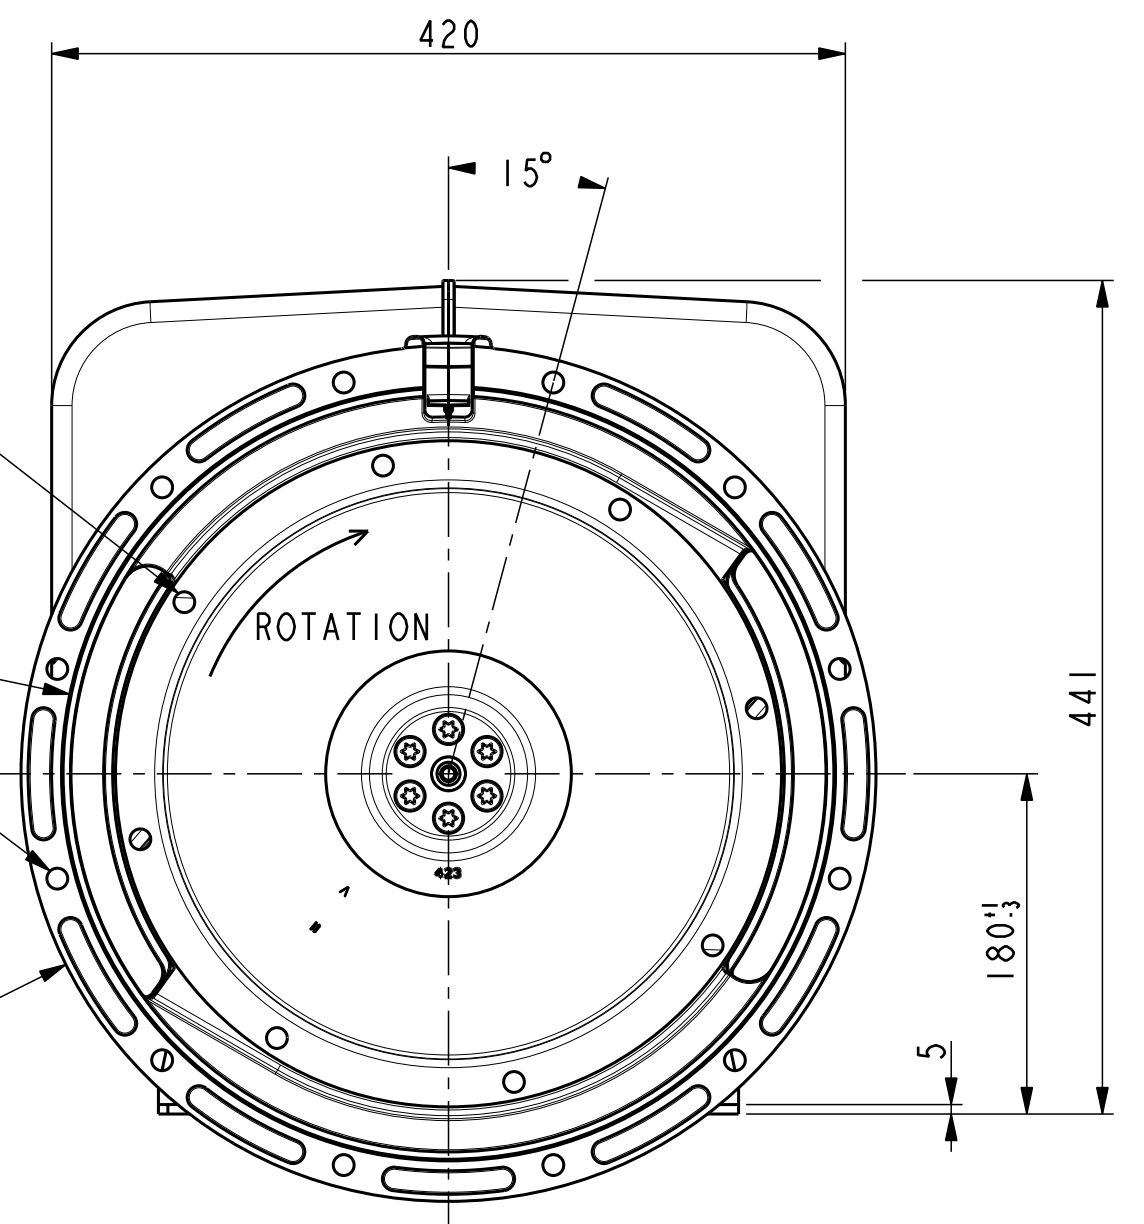


TYPE	Xg	Masse Kg Weight	J Kgm ²
TAL042 G	295	177	0,3957
TAL042 F	287	172	0,3765

Pre perçage Ø21 Ø25 Ø32 Ø40 Ø50
 Predrilling

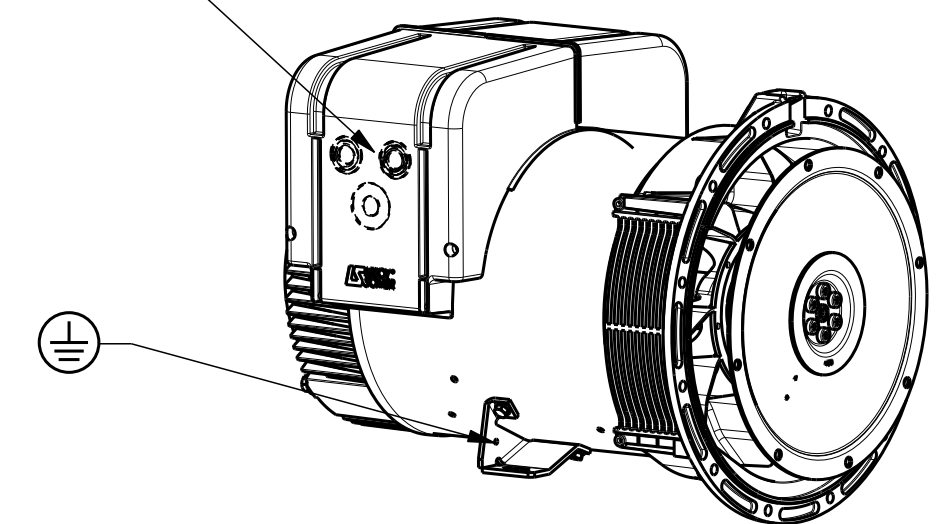

ECHELLE 0,125

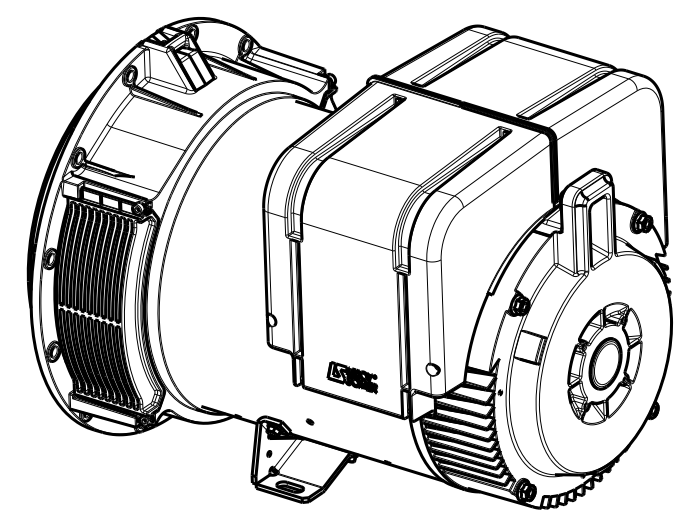

ECHELLE 0,125

-	-	-	-	-	-	-
-	-	-	-	-	-	-
a	x	x	14-422	x	x	x
INDICE	DATE	NATURE DE LA MODIFICATION	N° C.T.	NOM	VERIF B.E.	VERIF METH
Tolerances generales:			Etats de surfaces (NFE 05-016) Ra: - partout sauf indications			
Ref: -			Echelle Machine: ALTERNATEUR ALTERNATOR			
Obs: SAE 3 - 11 1/2 H=180 F/G			0,250 TAL 042			
Matiere:			Designation: ENCOMBREMENT			
Modele de base: -			OUTLINE			
Variante: -			MOTEURS LEROY-SOMER 16015 ANGOULEME - FRANCE			
Composant: -			-			
Compose: -			-			
Dessine: PRIKRYL		Verif methodes		-		
Verifie:		-		-		
Date: 13/09/2014		-		-		
A2			TAL042-8-004			A